



ALKO *Drainage pumps*

POWERFUL WASTEWATER PUMPS FOR THE HOUSE AND GARDEN

DRAINAGE PUMP RANGE

UNIVERSAL ANGLE CONNECTION

AL-KO wastewater pumps are fully equipped with a freely pivoting 90° angle connection, in order to prevent undesired kinking of the pump hose. With a combination adapter, they are suitable for different hose sizes

PARTICULATE SIZE UP TO 30MM

Thanks to their large suction openings, the Drainage models also pump contaminated water with particles up to 30 mm in suspension, effortlessly and smoothly



LONG OPERATING TIMES

A maintenance-free motor, the specially treated motor shaft made from INOX stainless steel as well as the fibreglass reinforced polypropylene housing are features which guarantee a long service life in AL-KO wastewater pumps

YOUR ADVANTAGES


Powerful and solid | Flow rates up to 12.000 l/h | Guaranteed flow with Vortex impeller geometry | Universal angle connection included

LONG-TERM

The sturdy and robust design with multiple seal set as well as corrosion free materials means that AL-KO wastewater pumps are excellently suited even to extreme requirements. This guarantees a long service life

PERFECTLY EQUIPPED

Equipped with a float switch for automatically switching on and off as well as a 90° angle connection and combination adapter for commonly encountered hose size, AL-KO wastewater pumps tick all the boxes with regards to trouble-free operation

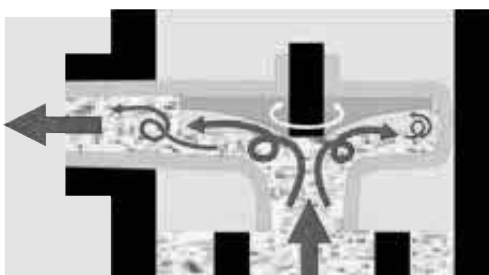

FOR EXTREME SITUATION

Thanks to the special vortex impeller geometry, the BVP 1900 model can effortlessly cope with even highly contaminated water with up to 5 percent suspended material and particulate sizes up to 38 mm – ideal for pumping out and draining flooded excavation pits.

YOUR ADVANTAGES

Flow rates up to 19.000 l/h | Special impeller technology, also suited for extreme requirements | Optimum corrosion protection for a long service life | Multiple seal set with additional V-seal

TECHNICAL SPECIFICATIONS

DRAIN PUMP RANGE

DRAIN 7000 Classic / DRAIN 12000 Comfort / DRAIN 15000 Inox / BVP 19000 / WQ-F



For wastewater




Pumps suspended dirt particles up to 38 mm in diameter



Powerful, with special seal




Pumps suspended dirt particles up to 38 mm in diameter

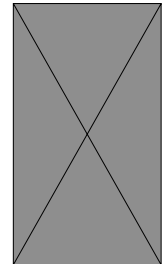

Two-phased mechanical seal, tungsten carbide, can work more than 1000 hours

	DRAIN 7000 CLASSIC	DRAIN 12000 COMFORT	DRAIN 15000 INOX	BVP 19000	WQ - F
MOTOR POWER	350 watt	850 watt	1.100 watt	1.100 watt	1.500 watt
MAX. HEAD	6 m	10 m	11 m	11 m	18 m
MAX. FLOW RATE	7.000 l/h	12.000 l/h	15.000 l/h	19.000 l/h	30.000 l/h
MAX. SUBMERSIBLE DEPTH	5 m	5 m	5 m	7 m	7 m
MAX. PARTICULATE SIZE	30 mm	30 mm	35 mm	38 mm	20 mm
PUMP OUTPUT Ø	1 1/4"	1 1/2"	1 1/2"	1 1/2"	2 1/2"
WEIGHT APPROX.	4.4 kg	6.9 kg	6.8 kg	8 kg	14 kg
CABLE LENGTH	10 m	10 m	10 m	10 m	5 m

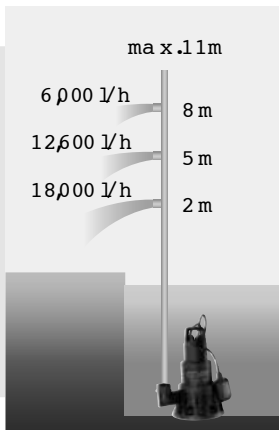

THE POWERFUL SUBMERSIBLE PUMPS

With flow rate up to 19.000 l/h and a maximum particulate size up to 38 mm, AL-KO wastewater pumps are enormously powerful. In addition, with pump housings made from chromium-nickel steel or plastic and motor shafts made from chromium-nickel steel, they are enduringly protected against corrosion

AL-KO AQUATROLLEY

WITH THE AQUATROLLEY, THERE IS NO NEED TO LUG HEAVY WATERING CANS AROUND

CONVENIENT WATERING

Watering anywhere without heavy watering cans or the bother of a garden hose. The extra-large, easily cleaned water tank enables the Aquatrolley to gently water plants, beds, extensive gardens or borders – without connecting to the mains, thanks to battery technology



SIMPLE FILLING

The large tank opening means the Aquatrolley can be filled quickly and easily using a garden hose. It is also possible to add fertiliser directly to the water tank if required – for optimum plant care



OFF THE GRID

The build-in 12V rechargeable battery means the powerful pump of the Aquatrolley is always ready to serve, even when there is no socket-outlet in reach

TECHNICAL SPECIFICATIONS

AQUATROLLEY
A300 Aquatrolley

OVER ROUGH AND SMOOTH

XXL tyres and a low centre of gravity means the Aquatrolley can be manoeuvred easily and conveniently on any terrain. Even steps or stairs represent no obstacle



A300 AQUATROLLEY	
TANK CONTENT	Approx. 26L
MAX. FLOW RATE	720 l/h
MAX. PUMP PRESSURE	0.8 bar
OPERATING VOLTAGE	Battery power 12 VDC
IMPELLERS Ø	2x275 mm
WEIGHT APPROX.	12 kg



FLEXIBLE IN ALL DIRECTIONS

The long spray nozzle and flexible hose system brings all the plants and beds within easy reach. Even watering hanging baskets is made into mere child's play

YOUR ADVANTAGES

No more lugging heavy watering cans around.
Extra large water tank
Easy to fill and clean
Includes a long spray nozzle

AL-KO FOUNTAIN PUMPS

SP FOUNTAIN PUMP RANGE



ELEGANTLY ALIGNED

The pivoting and height-adjustable standpipe ensures optimal alignment of the water features, even if the pond floor is slanted or uneven



OPTIMUM WATER QUALITY

The SPF 3000 pump creates optimal pre-requisites for aquatic plants and pond inhabitants in still water, thanks to the large surface triple filter system with two mechanical components and one active charcoal component



HARMONIOUSLY INTEGRATED

The SPF 3000 pump in discrete black can be harmoniously inserted in the total look by placing pebbles or rocks on the special recess in the upper pump housing. This added weight also ensures optimal pump stability



AL-KO FOUNTAIN PUMPS OFFER A WIDE VARIETY OF DESIGN OPTIONS

1. Cascading fountain
2. Foam fountain
3. Bell fountain

YOUR ADVANTAGES

Large-surface triple filter system with an active charcoal component (SPF 3000) | Variable fountain height | up to three fountain attachments included | Adjustable adapter for water-courses and water spouts

TECHNICAL SPECIFICATIONS

SP FOUNTAIN PUMP RANGE
SP 700 / SP 1200 / SPF 3000



HEALTHY BIOTOPE

Circulating the water not only provides a delightful visual appeal, it also ensures the water remains clear and rich in oxygen



High pressure and big flow rate

High pressure and big flow rate

With 3-way activated charcoal filter

	SP 700	SP 1200	SPF 3000
MOTOR POWER	11 watt	18 watt	54 watt
MAX. HEAD	1.3 m	1.25 m	2.6 m
MAX. FOUNTAIN HEIGHT	87 cm	45 cm	110 cm
MAX. FLOW RATE	650 l/h	1.200 l/h	2.650 l/h
NUMBER OF WATER FEATURES	2	2	3
CABLE LENGTH	10 m	10 m	10 m
WEIGHT APPROX.	1.5 kg	1.8 kg	2.8 kg